


## Screen Provision Modular Wall Panels

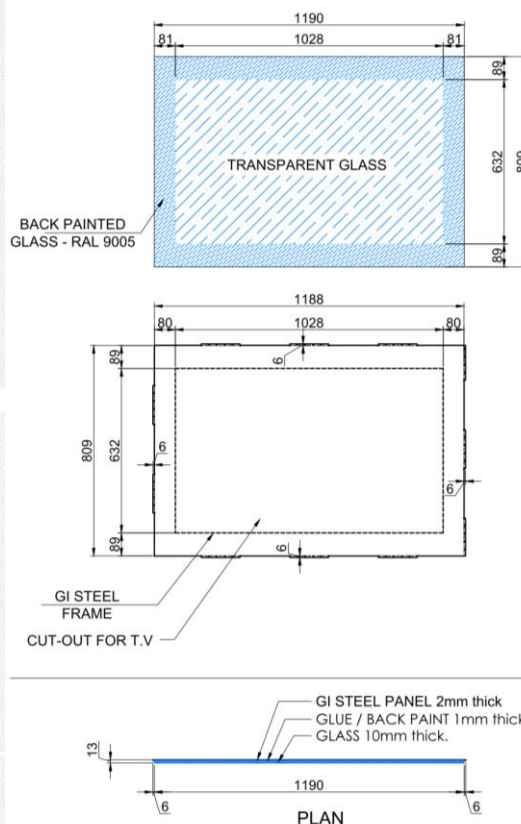

### Description:

Transforma provides a modular solution for screen protection inside the operation rooms and other general areas in the hospital, suiting the specific requests of clients in terms of screen sizes, screen locations and by also maintaining the required hygiene standards; the screen provision panels are manufactured with back-painted tempered glass with a transparent viewing area (suited to the screen size) attached to anti-microbial powder coated galvanized steel support; the aim of this modular provision panel is to provide easy maintenance access by simply removing it when needed, and to provide sealed protection for the hospital environment in an aesthetic flush built-in design.

Dimensions	
Panel Width	Standard panel size 900 x 1,000 mm (For 42" screen)
Panel Height	*Dimension as per screen size (to be communicated)
Panel Thickness	14 mm

Technical Data	
Panel Composition	Tempered Glass; 10 mm thickness
	Anti-Microbial powder coating; Activity reduction: 99.8%
	Galvanized Steel; 2 mm thickness
Glass finishes	Back-Painting color black; other RAL color preferences available
	Transparent viewing section; size of provided screen (must be communicated)
	Remote control provision to be communicated for exact location
Fixture method	Screws on Galvanized Steel supporting structure
Fixture covering	Silicone gasket
Origin	Italy

#### Standards & Certification:

- Quality certification: complies to European standard UNI EN ISO 9001:2008
- Material complies to European Standard EN 520: 2004 + A1: 2009UNI EN ISO 10346: 2011